


FEASIBILITY STUDY AND CONCEPTUAL PLAN FOR THE RELOCATION OF THE SAN ELIJO LAGOON INLET



for

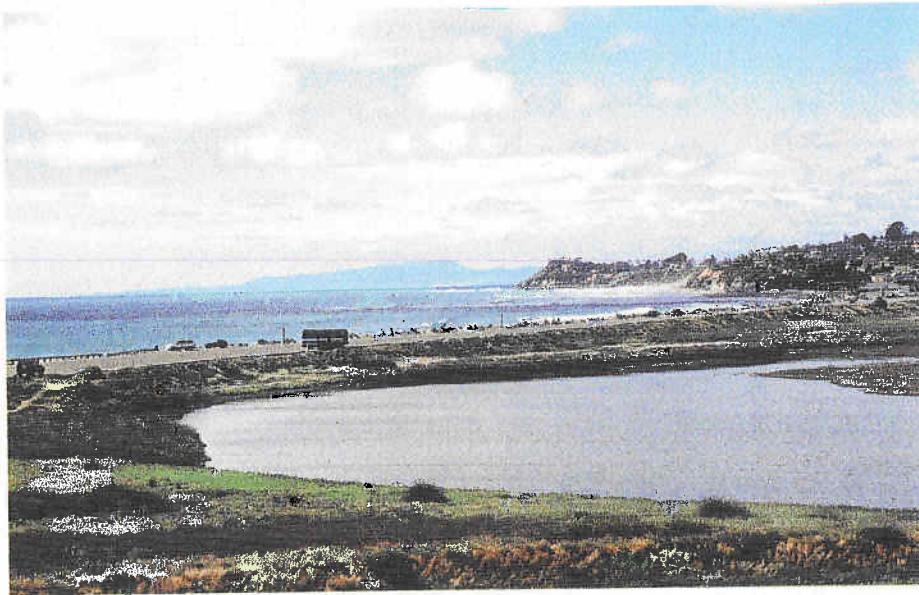

Engineering Services Department
505 S. Vulcan Avenue
Encinitas, CA 92024

by



COASTAL ENVIRONMENTS

Oceanographic and Coastal Engineering Services

2166 Avenida de la Playa, Suite E
La Jolla, CA 92037

28 February 2001
CE Reference No. 01-01

Kerry Miller

**FEASIBILITY STUDY AND CONCEPTUAL PLAN FOR THE
RELOCATION OF THE SAN ELIJO LAGOON INLET**

DRAFT/FINAL REPORT

by

COASTAL ENVIRONMENTS
2166 Avenida de la Playa, Suite E
La Jolla, CA 92037

28 February 2001
CE Reference No. 01-01

TABLE OF CONTENTS

LIST OF FIGURES	v
LIST OF TABLES	vii
EXECUTIVE SUMMARY	viii
ACKNOWLEDGMENTS	xi
1.0 INTRODUCTION	1-1
2.0 SAN ELIJO LAGOON	2-1
2.1 Lagoon Description	2-1
2.2 Lagoon Bathymetry	2-1
2.3 Lagoon Hydrodynamics	2-1
2.4 Lagoon Biological Conditions	2-5
3.0 COASTAL AREA AND OCEANOGRAPHIC CONDITIONS	3-1
3.1 Description of Coastal Area	3-1
3.2 Nearshore and Offshore Topography	3-1
3.2.1 Beach Profiles	3-1
3.2.2 Offshore Bathymetry and Hard Substrate	3-5
3.3 Subtidal Sand Thickness	3-5
3.4 Beach Sand Thickness	3-5
3.5 Oceanographic Conditions	3-8
3.5.1 Wave Climate	3-8
3.5.2 Tides	3-8
3.5.3 Longshore and Rip Currents	3-10
3.6 Intertidal Biological Conditions	3-13
4.0 PROJECT ALTERNATIVES	4-1
4.1 Alternative 1: New Bridge at Present Location	4-1
4.1.1 Providing Highway 101 Storm Protection	4-1
4.1.2 Increasing Circulation and Water Quality	4-1
4.1.3 Improving Inlet Stability	4-1
4.2 Alternative 2: New Inlet South of Current Inlet and North of Businesses	4-3
4.3 Alternative 3: New Inlet South of the Sewer Outfall	4-3
4.3.1 Providing Highway 101 Storm Protection	4-3
4.3.2 Increasing Circulation	4-3
4.3.3 Improving Inlet Stability	4-5
4.4 Dredging Plans	4-5
5.0 WAVES AND LONGSHORE SAND TRANSPORT AT CARDIFF	5-1
5.1 Wave Climate at Cardiff	5-1
5.1.1 Relationship between Wave Conditions at Oceanside and Cardiff	5-1
5.1.2 Variation of Wave Heights for Various Alternatives	5-3
5.2 Longshore Sediment Transport at Cardiff	5-5

5.2.1	Estimates of Longshore Sediment Transport Rates from Oceanside	
	Wave Data	5-5
5.2.2	Variation of Longshore Sediment Transport for Various Alternatives	5-7
6.0	LAGOON HYDRODYNAMICS	6-1
6.1	Approach	6-1
6.2	Numerical Model	6-1
6.3	Model Calibration	6-2
6.4	Results	6-2
6.5	Stability of San Elijo Lagoon Inlet	6-10
6.6	Inlet Maintenance Plan	6-10
7.0	LAGOON HYDROLOGY	7-1
7.1	Peak Flows	7-1
7.2	Water Elevation	7-1
7.3	Flow Velocity	7-4
7.4	Sedimentation	7-4
7.5	Scour Depth	7-4
7.6	Hydraulic Model Results for Proposed Alternatives	7-6
7.6.1	Alternative 1: Replace the Existing Highway 101 Bridge	7-6
7.6.2	Alternative 2: Construct a New Highway 101 Bridge North of Charlie's Restaurant	7-8
7.6.3	Alternative 3: Construct a New Highway 101 Bridge South of the Sewer Outfall	7-9
8.0	BIOLOGICAL BENEFITS AND IMPACTS	8-1
8.1	Alternative 1	8-1
8.1.1	Retaining Existing Inlet and Constructing New 300-foot Span Bridge for Highway 101	8-1
8.1.2	Providing Storm Protection for Highway 101	8-1
8.1.3	Constructing Culverts Through Existing Railroad Berm	8-2
8.1.4	Dredging Existing Channels of the Lagoon, Creating New Channels, and Dredging Some Areas of the West and Central Basins	8-2
8.1.5	Dredging Existing Channels of the Lagoon	8-4
8.1.6	Creating New Channels	8-4
8.1.7	Dredging of Selected Areas of Intertidal Flats in the Western and Central Basins	8-5
8.1.8	Replacing Existing Railroad Trestle with a 500-foot Bridge on a New Alignment	8-6
8.1.9	Replacing Existing Railroad Trestle with a 3,600-foot-long Span Bridge on a New Alignment	8-6
8.1.10	Constructing One or Two Jetties at the New Inlet	8-7
8.2	Alternative 2	8-7
8.2.1	Relocating Lagoon Inlet South of Current Inlet and North of Businesses	

	and Building New Highway 101 Bridge	8-8
8.3	Alternative 3	8-8
8.3.1	Relocating Lagoon Inlet South of Ocean Outfall and Building New Highway 101 Bridge	8-9
8.3.2	Dredging Western and Central Basins to a Greater Extent than Alternative 1 and 2	8-9
8.3.3	Replacing Existing Highway 101 Berm with a 3,600-foot-long Span Bridge on the Existing Alignment	8-11
8.3.4	Replacing Existing Highway 101 Berm with a 3,600-foot-long Span Bridge along a New Alignment	8-11
8.3.5	Replacing Existing Highway 101 Berm with a 3,600-foot-long Span Bridge Immediately Adjacent to the 3,600-foot Railroad Bridge	8-12
8.4	Conclusions	8-12
9.0	OVERVIEW OF BRIDGE ALTERNATIVES	9-1
9.1	Highway Bridge Alternatives	9-1
9.1.1	Alternative 1: Replace the Existing Highway 101 Bridge	9-1
9.1.2	Alternative 2: Construct a New Highway 101 Bridge North of Charlie's Restaurant	9-4
9.1.3	Alternative 3: Construct a New Highway 101 Bridge South of the Sewer Outfall	9-4
9.2	Railroad Bridge Alternatives	9-4
10.0	HIGHWAY 101 ENGINEERING MODIFICATIONS	10-1
10.1	Highway Elevation Modifications	10-1
10.1.1	Elevation Modification A	10-1
10.1.2	Elevation Modification B	10-1
10.2	Highway Horizontal Modifications	10-1
10.2.1	Horizontal Modification A	10-1
10.2.2	Horizontal Modification B	10-1
10.3	Highway Foundation Modifications	10-1
10.4	Impacts of Highway Elevation Modifications	10-3
10.4.1	Impacts of Elevation Modification A	10-3
10.4.2	Impacts of Elevation Modification B	10-3
10.5	Impacts of Horizontal Modifications	10-5
10.5.1	Impacts of Horizontal Modification A	10-5
10.5.2	Impacts of Horizontal Modification B	10-5
10.6	Impacts of Highway Foundation Modifications	10-6
10.7	Utility Issues Associated with the Inlet Alternatives and Highway Modifications	10-6
10.7.1	Inlet Location	10-6
10.7.2	Highway Elevation Modifications	10-6
10.7.3	Highway Horizontal Modifications	10-6
10.7.4	Highway Foundation Modifications	10-6
10.8	Construction Staging	10-6

11.0	DISPOSAL OF LAGOON SEDIMENTS	11-1
11.1	Characterization of Lagoon Sediments	11-1
11.2	Disposal of Dredge Spoil	11-1
11.3	Regulations	11-5
11.4	Conclusion	11-9
12.0	RECREATIONAL ASSESSMENT	12-1
12.1	Present Recreational Usage	12-1
12.2	Value of Sandy Beaches	12-1
12.3	Project Impacts	12-2
12.4	Project Benefits	12-2
12.5	Beach Users' Interview	12-3
12.6	Conclusion	12-3
13.0	ECONOMIC IMPACT TO BUSINESS	13-1
13.1	Survey Description	13-1
13.2	Findings and Recommendations	13-1
13.2.1	Impact of Three Alternatives Virtually Identical	13-1
13.2.2	Economic Impact of Bridge Construction	13-1
13.2.3	Business Sensitivity	13-3
13.2.4	Duration	13-4
13.2.5	Traffic Patterns	13-4
13.3	Cost/Benefit Considerations	13-6
13.3.1	Potential Benefits	13-6
13.3.2	Potential Drawbacks	13-7
14.0	PERMITTING	14-1
15.0	PROJECT EVALUATION	15-1
15.1	Chapter Objectives	15-1
15.2	Considered But Discarded Project Elements	15-1
15.3	Description of Selected Alternatives	15-2
15.4	Evaluation of Alternatives	15-2
16.0	SUMMARY AND CONCLUSIONS	16-1
17.0	RECOMMENDATION	17-1
18.0	REFERENCES	18-1
APPENDIX A	TECHNICAL REPORTS SUBMITTED TO CITY OF ENCINITAS	A-1
APPENDIX B	LAGOON DREDGING PLANS	B-1
APPENDIX C	BATHYMETRY, HARD SUBSTRATE, AND SAND THICKNESS	C-1
APPENDIX D	HYDRODYNAMIC MODEL DESCRIPTION	D-1
APPENDIX E	PRELIMINARY COST ESTIMATES	E-1

LIST OF FIGURES

- Figure 1-1 Location map of San Elijo Lagoon.
- Figure 2-1 Map of San Elijo Lagoon, showing lagoon basins and freshwater inflow into the lagoon.
- Figure 2-2 Map showing the watershed area of the San Elijo Lagoon.
- Figure 2-3 The bathymetry of San Elijo Lagoon.
- Figure 2-4 Habitat coverage at San Elijo Lagoon.
- Figure 2-5 Nesting, feeding and roosting areas at San Elijo Lagoon for a) Belding's Savannah sparrow, b) light-footed clapper rail, c) western snowy plover, and d) California least tern.
- Figure 3-1 Map of coastal area in the vicinity of San Elijo Lagoon.
- Figure 3-2 Map showing the locations of beach ranges.
- Figure 3-3 Beach profiles at Cardiff State Beach.
- Figure 3-4 Bathymetry and hard substrate exposure offshore of San Elijo Lagoon.
- Figure 3-5 Sediment thickness and hard substrate exposure offshore of San Elijo Lagoon.
- Figure 3-6 Wave exposure for Cardiff illustrating island shadowing effects. Modified from USACOE (1991).
- Figure 3-7 Map showing predominant direction of longshore currents and rip current locations.
- Figure 4-1 Proposed inlet locations (left panel), Highway 101 alignment options (middle panel), and railroad bridges and alignments (right panel).
- Figure 4-2 The proposed 3,600-foot-long Highway 101 bridge alignment options.
- Figure 4-3 Surface area of San Elijo Lagoon before and after dredging.
- Figure 4-4 Water volume in San Elijo Lagoon before and after dredging.
- Figure 5-1 Location of the PUV wave gauges deployed in Oceanside and Cardiff.
- Figure 5-2 The maximum monthly significant wave height between 1978 and 1994 at Cardiff (calculated) and Oceanside (measured).
- Figure 5-3 Comparison between significant wave heights (H_s) at inlet locations for Alternatives 1, 2 and 3.
- Figure 5-4 Estimates of longshore transport at Oceanside and Cardiff.
- Figure 5-5 Monthly means and standard deviation of the longshore transport rates at Cardiff.
- Figure 5-6 Cumulative distribution for longshore sand transport at Cardiff and Oceanside.
- Figure 6-1 Comparison between measured and predicted water level at railroad bridge. Measurements were made on June 23 (Elwany et al, 1994a).
- Figure 6-2 Map of San Elijo Lagoon. Numbers show selected control points (C) at which water elevations and flow velocities were predicted.
- Figure 6-3 Water elevations at control points for Alternative 1. Mean ocean tide with 5.6 ft range.
- Figure 6-4 Water elevations at control points for Alternative 2. Mean ocean tide with 5.6 ft range.
- Figure 6-5 Water elevations at control points for Alternative 3. Mean ocean tide with 5.6 ft range.
- Figure 6-6 Water levels at various control points for Alternatives 1, 2, and 3. In response to 24-hour measured spring tide on 23 June 1994 (Figure 6-1).

LIST OF FIGURES, Continued

- Figure 6-7 Water velocity at various control points for Alternatives 1, 2, and 3. In response to 24-hour measured spring tide on 23 June 1994 (Figure 6-1).
- Figure 7-1 Hydrographs for peak day flood events with return periods of 25-yr, 50-yr, 100-yr, 200-yr and 500-yr.
- Figure 7-2 Flow velocity along the lagoon for different flood return periods.
- Figure 9-1 Conceptual plan for a 300-foot-long, box girder bridge over San Elijo Lagoon inlet.
- Figure 10-1 Highway elevation modifications.
- Figure 10-2 Map of San Elijo Lagoon showing the location of sewage and gas pipelines.
- Figure 11-1 Surface sediment sample locations collected from San Elijo Lagoon on 25 and 26 May 2000.
- Figure 11-2 Proposed dredging areas with the railway berm kept in place.
- Figure 11-3 Proposed dredging areas with the option of removing the railway berm.
- Figure 13-1 Traffic patterns for Highway 101. Number of vehicles per hour heading north and south (top panel) and total number of vehicles per hour using the highway (bottom panel).
-
- Figure B-1 Lagoon bathymetry after dredging for lagoon inlet Alternative 1 with railroad berm left in place.
- Figure B-2 Lagoon bathymetry after dredging for lagoon inlet Alternative 1 with railroad berm removed.
- Figure B-3 Lagoon bathymetry after dredging for lagoon inlet Alternative 2 with railroad berm left in place.
- Figure B-4 Lagoon bathymetry after dredging for lagoon inlet Alternative 2 with railroad berm removed.
- Figure B-5 Lagoon bathymetry after dredging for lagoon inlet Alternative 3 with railroad berm left in place.
- Figure B-6 Lagoon bathymetry after dredging for lagoon inlet Alternative 3 with railroad berm removed.
-
- Figure C-1 Vessel track for offshore survey, December 15-17, 1999.
- Figure C-2 Bathymetry and hard substrate exposure offshore of San Elijo Lagoon.
- Figure C-3 Sediment thickness and hard substrate exposure offshore of San Elijo Lagoon.
- Figure C-4 Map showing the location of sand thickness surveys and position of shoreline at Cardiff State Beach.
- Figure C-5 Sand thickness at transects CA2 (top panel) and CA3 (bottom panel).
- Figure C-6 Sand thickness at transects CA4 (top panel) and CA5 (bottom panel).
- Figure C-7 Sand thickness at transects CA7 (top panel) and CA9 (bottom panel).
-
- Figure D-1 Space grid representation and evaluation points for velocities (u and v).

LIST OF TABLES

Table 2-1	Habitat area distribution of San Elijo Lagoon (in acres).
Table 3-1	Statistics for longshore currents, January to May 2000.
Table 5-1	Characteristics of longshore transport at San Elijo Lagoon, Cardiff, from 1978 to 1994, yd ³ /day (m ³ /day).
Table 5-2	Comparison between the longshore transport at Oceanside and Cardiff.
Table 6-1	Numerical results of water level elevation (ft, NGVD) for various alternatives in response to mean tide conditions "a" with 5.8 ft range.
Table 6-2	Inflow-outflow velocities and tidal prism for various alternatives.
Table 7-1	Estimated annual frequency flow at San Elijo Lagoon (estimated from peak flow data from 1952 to 1998 at Las Flores gauging station).
Table 7-2	Summary of hydraulic model results for baseline conditions and project alternatives.
Table 8-1	Area of lagoon habitat (in acres) for each basin under existing conditions and proposed alternatives.
Table 10-1	Impacts of highway engineering modifications on access to businesses and parking lots and number of parking spaces.
Table 11-1	Sediment grain size distribution and total organic carbon content.
Table 11-2	Comparison of median grain size for sediment samples collected by CE (2000) and PWA (1992).
Table 11-3	Estimated dredge spoil volumes (in cubic yards).
Table 13-1	Summarized results of business survey.
Table 14-1	Summary of required permits and approvals.
Table 15-1	San Elijo Lagoon project alternatives: advantages and disadvantages.
Table 15-2	Evaluation of alternatives.
Table 15-2A	Initial evaluation of the alternatives. Each alternative has a score for each criterion, ranging from 10 (lowest) to 100 (highest).
Table 15-2B	The weighting of the topics for the final evaluation.
Table 15-2C	Final evaluation of the alternatives, with weighted score for each criterion.
Table 15-3	The final ranking of the proposed alternatives.
Table A-1	Technical reports submitted to City of Encinitas.

